

WILLBRANDT Rubber Expansion Joint Type 58

■ not in stock

DN 50 to DN 3000

Type 58 is a cylindrical rubber expansion joint that achieves very low flow resistance because of its uncorrugated bellow geometry. It is suitable for conveying media that contain solids, even at high flow rates. It is also characterised by its flexible installation length and variety of rubber qualities, which means that a suitable rubber compound is available for every application (see material descriptions on the following page). Its design means that it can only absorb minimal axial movement!

Type 58 is used in plant engineering, water technology and wastewater technology to absorb lateral movement and vibration and to insulate sound.



Bellow design	Smooth cylindrical rubber bellow with reinforcement and with solid rubber flange, self-sealing (no additional seals required). Suitable for backing flanges.	Approvals/Conformity	CE, drinking water conform (WRAS), FDA and EG 1935/2004 conform. (Detailed overview on page 5.)
Flange version	Both sides with backing flange made of hot-dip galvanized steel, drilled according to DIN PN 10 (standard). Other materials and dimensions are possible.	Accessories	- Tie rods - Vacuum supporting spiral/rings (vulcanised) - Guide sleeves - Potential equalisation - Flame-resistant protective covers - Dust and splash protection covers - Earth cover / sun protection cover Further information on page 99 - 105.
Vacuum resistance	Vacuum-proof only short lengths. Longer versions should be fitted with a vulcanised vacuum supporting spiral.		

Specifications

Bellow		Bellow design			Max. temperature °C	Permissible operating data									
Colour code	Colour marking	Core (inner)	Reinforcement	Cover (outer)		°C	bar	°C	bar	°C	bar	°C	bar	°C	bar
red		EPDM	Polyamide	EPDM	100										
blue		EPDM TW	Polyamide	EPDM	100										
white-red		EPDM beige	Polyamide	EPDM	100										
green		CSM	Polyamide	CSM	100										
yellow		NBR	Polyamide	NBR	100										
white		NBR beige	Polyamide	NBR	100										
grey		CR	Polyamide	CR	90										
red-blue-red		EPDM	Aramid	EPDM	100										
blue-blue-blue		EPDM TW	Aramid	EPDM	100										
white-blue-red		EPDM beige	Aramid	EPDM	100										
orange-blue-orange		EPDM HT	Aramid	EPDM HT	120										
green-blue-green		CSM	Aramid	CSM	100										
yellow-blue-yellow		NBR	Aramid	NBR	100										
white-blue-white		NBR beige	Aramid	NBR	100										
grey-blue-grey		CR	Aramid	CR	90										
lilac-blue-lilac		FPM	Aramid	FPM	180										
-	-	Silicone	Aramid	Silicone	180										
-	-	Silicone	Glass fabric	Silicone	200										

Expansion joints will be designed according to your operating parameters.

Important information

For aggressive media, please have the material resistance checked by our engineers. The bellows must not be painted or insulated at media temperatures >50 °C. Please also note the planning and installation instructions.

WILLBRANDT Rubber Expansion Joint Type 58

Application

Type 58 red (EPDM)

For water, sea water, cooling water with glycol or other chemical additives for treating water, saline solutions, weak acids and weak alkaline solutions. Unsuitable for aliphatic, aromatic and chlorinated hydrocarbons, oil or oily media.

Type 58 blue (EPDM TW)

Like type 58 red, but drinking water conform (WRAS).

Type 58 white-red (EPDM beige)

Like type 58 red, but with light-coloured internal rubber in food-grade (FDA and EG 1935/2004 conform). Not approved for drinking water.

Type 58 green (CSM)

For chemicals, aggressive, chemical wastewater and compressor air containing oil.

Type 58 yellow (NBR)

For oils, fats, gases, diesel fuels, kerosene and crude oil. Not suitable for aromatic and chlorinated hydrocarbons, esters and ketones.

Type 58 white (NBR beige)

Like type 58 yellow, but with light-coloured internal rubber in food-grade (FDA and EG 1935/2004 conform). Not approved for drinking water!

Type 58 grey (CR)

For water, wastewater, swimming pool water, salt water, cooling water with anti-corrosive products containing oil, oil mixtures and compressed air containing oil.

Type 58 red-blue-red (EPDM/aramid)

Like type 58 red, but with aramid fabric.

Type 58 blue-blue-blue (EPDM TW/aramid)

Like type 58 blue, but with aramid fabric.

Type 58 white-blue-red (EPDM beige/aramid)

Like type 58 white-red, but with aramid fabric.

Type 58 orange-blue-orange (EPDM HT/aramid)

Like type 58 red, but with aramid fabric for temperatures up to +120 °C.

Type 58 green-blue-green (CSM/aramid)

Like type 58 green, but with aramid fabric.

Type 58 yellow-blue-yellow (NBR/aramid)

Like type 58 yellow, but with aramid fabric.

Type 58 white-blue-white (NBR beige/aramid)

Like type 58 white, but with aramid fabric.

Type 58 grey-blue-grey (CR/aramid)

Like Type 58 grey, but with aramid fabric.

Type 58 lilac-blue-lilac (FPM/aramid)

For flue gas desulphurisation systems and bio-diesel. High chemical resistance to benzene, xylene, toluene, aromatic, chlorinated hydrocarbons, mineral acids and fuels with an aromatic content of more than 50 %. Temperatures of up to +180 °C.

Type 58 silicone (silicone/glass fabric or aramid)

Suitable for hot air, acetic acid. Satisfactory resistance to aliphatic engine and gear oils. Also available in foodstuff quality. Excellent resistance to ageing, UV, ozone and weather. Very good radiation resistance. Not for use with steam above 120 °C. No resistance to fuels.

Important information


Please note the appropriate fixed point constructions and plain bearings in your piping system, as well as the tolerances as per the FSA Handbook (see the technical appendix on page 124)! For more information please refer to our planning and installation instructions (page 107 - 125).

WILLBRANDT Rubber Expansion Joint Type 58

Design A - without tie rods


Can be used to absorb compression and lateral movement, as well as to absorb vibration and insulate sound.

Can only absorb minimal expansion.

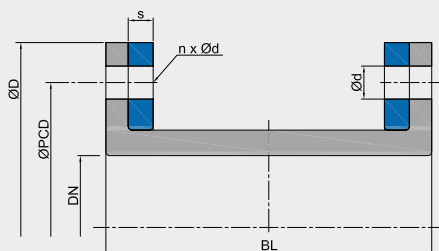

Design M - with tie rods / shear limiters

To accommodate the reaction force of the expansion joint in compression while simultaneously allowing for lateral movement. The use of PTFE-coated spherical washers and conical sockets reduces the frictional force considerably during lateral movement. Can be used to absorb vibration and lateral movement.

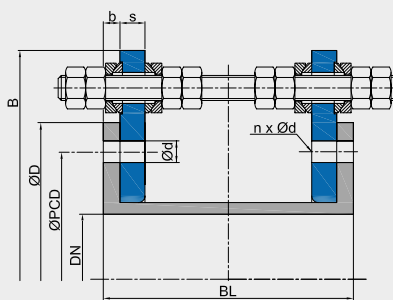

Note: Can only absorb lateral movement!

Dimensions for design A / design M (Example values - may vary depending on specification)

DN	Length BL*1 mm	Bellows		Flange PN 10*3						Movement absorption		Weight kg
		b mm	WF*2 mm²	ØD mm	ØPCD mm	Ød mm	n	s mm	B mm	axial - mm	lateral*4 ± mm	
50	200 - 1000	Dependent on operating pressure	1963	165	125	18	4	Dependent on operating pressure	255	5	10	4
65	200 - 1000		3317	185	145	18	8		275	5	10	5
80	200 - 1000		5024	200	160	18	8		290	5	10	5
100	200 - 1000		7850	220	180	18	8		310	5	10	6
125	200 - 1000		12266	250	210	18	8		340	5	10	7
150	200 - 1000		17663	285	240	22	8		375	5	10	9
200	200 - 1000		31400	340	295	22	8		462	13	14	11
250	200 - 1000		49063	395	350	22	12		517	13	14	13
300	200 - 1000		70650	445	400	22	12		567	13	13	12
350	200 - 1000		96163	505	460	22	16		627	13	13	14
400	200 - 1000	Dependent on operating pressure	125600	565	515	26	16	Dependent on operating pressure	703	13	13	18
450	200 - 1000		158963	615	565	26	20		753	13	12	25
500	200 - 1000		196250	670	620	26	20		808	13	12	17
600	200 - 1000		282600	780	725	30	20		942	13	12	22
700	200 - 1000		384650	895	840	30	24		1057	13	11	29
800	200 - 1000		502400	1015	950	33	24		1117	15	13	81
900	200 - 1000		635850	1115	1050	33	28		1277	15	13	90
1000	200 - 1000		785000	1230	1160	36	28		1392	15	13	106
1100	200 - 1000		949850	1345	1270	36	32		1507	15	12	123
1200	200 - 1000		1130400	1455	1380	39	32		1617	15	12	139
1300	200 - 1000	Dependent on operating pressure	1326650	1565	1485	42	32	Dependent on operating pressure	1727	15	12	155
1400	200 - 1000		1538600	1675	1590	42	36		1837	15	12	172
1500	200 - 1000		1766250	1795	1705	48	36		1957	15	12	195
1600	200 - 1000		2009600	1915	1820	48	40		2100	15	11	222
1700	200 - 1000		2268650	2015	1920	48	44		2200	15	11	290
1800	200 - 1000		2543400	2115	2020	48	44		2300	15	11	306
1900	200 - 1000		2833850	2220	2125	48	48		2406	15	11	327
2000	200 - 1000		3140000	2325	2230	48	48		2511	15	11	350
2100	200 - 1000		3461850	2440	2335	56	48		2626	18	13	386
2200	200 - 1000		3799400	2550	2440	56	52		2736	18	13	416
2400	200 - 1000	Dependent on operating pressure	4521600	2760	2650	56	56	Dependent on operating pressure	2946	18	12	465
2500	200 - 1000		4906250	2860	2750	56	56		3046	18	12	485
2600	200 - 1000		5306600	2960	2850	56	60		3146	18	12	501
2800	200 - 1000		6154400	3180	3070	56	64		3366	18	12	572
3000	200 - 1000		7065000	3405	3290	62	68		3591	18	12	644

*1 Lengths available from 200 mm to 1000 mm.

*2 WF = effective area

*3 Other standards/dimensions possible.

*4 The lateral movement absorption applies to short installation lengths. The lateral movement absorption increases by 6 mm every 100 mm.

Table values correspond to a bellows design with 6 bar operating pressure at 60 °C.